


CM770

E-2 



Unique irregular wear pattern guarantees greater operator comfort, and lower rolling resistance performance

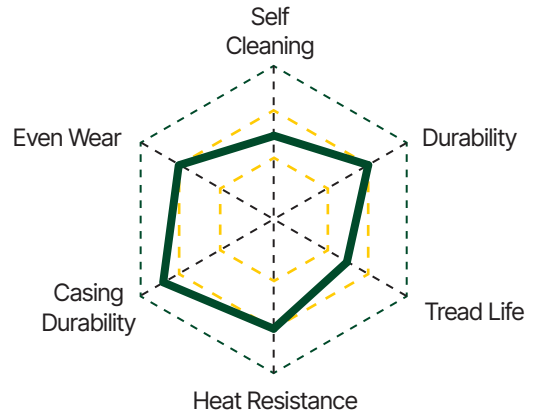

Special crane compound help offer shorter braking distance and longer tyre life

DOT/ECE Certificated

Tyre Size	Star Rating	TRA Code	Service Index	Standard Rim	OD		SW		OTD		Inflated Pressure		Type
					mm	inch	mm	inch	mm	32ND	kPa	PSI	
395/85R20	L 20PR	E-2	170F	10.00	1180	46	386	15	17.5	22	900	130	TL
385/95R24	★★★	E-2	170F/170E	10.00 / 1.5	1369	54	379	15	24	30	900	131	TT
385/95R25	★★★	E-2	170F/170E	10.00 / 1.5	1369	54	379	15	24	30	900	131	TL
445/95R25	★★★	E-2	174F/177E	11.25 / 2.0	1481	58	435	17	28	35	900	130	TL
505/95R25	★★★	E-2	186F	13.00 / 2.5	1595	63	496	20	26	33	900	130	TL